

**COLLINS**  
EQUIPMENT CORP.

3005 EAST 55TH STREET CLEVELAND, OHIO 44127-1290  
PHONE: 216-641-4300 OHIO WATS 800-362-3103  
SALES FAX: 216-641-1024 OFFICE FAX: 216-641-8001



E-MAIL: [sales@collinsequip.com](mailto:sales@collinsequip.com) WEBSITE: [www.collinsequip.com](http://www.collinsequip.com)  
Liquid Handling Equipment Sales and Service Rebuilding Installation

**Polysulfide Non Sag Paste**

Preparation: Prepare surface as trained by PTI. personnel. Blow off excess dust and contaminants. Remove oils from surface. Allow to dry.

**Part A & B**

Mixing: Pour components (B) curative into component (A) base pail. Mix for about three minutes with a mechanical jiffy-type mixer operated at low speed. Scrape sides of pail to ensure all product is well mixed.

**1.5 Gallon Unit**

Application: Can be applied up to 4" thick on horizontal surface, up to 20 mil on vertical surface.


**Lot #**

**97-PT SL (22355SL)**

Precautions: Apply between 40° - 110° F. Do not apply to wet concrete. Store all Components in a cool place. Keep away from flames. Always wear protective clothing, gloves and goggles during use. Do not use in an unventilated area. Do not apply to slabs on grade unless a heavy vapor barrier has been installed under slab. Do not apply to floors subjected to Hydrostatic pressure. Please refer to the MSDS for detailed safety precautions.

There is NO WARRANTY, representation or condition of ANY KIND, expressed or implied. (Including NO WARRANTY OF MERCHANTABILITY OR OF FITNESS EXCEPT THAT THE MATERIALS SHALL BE OF THE QUALITY SPECIFIED HEREIN, and none shall be implied by law. Except as otherwise provided herein quality shall be in accordance with sellers specifications. Final determination of the suitability of the material for the use contemplated by buyer is the the sole responsibility of buyer, and seller shall have no responsibility in connection with such suitability.

This product is intended for use by persons having practical working knowledge of products of this nature. Since PTI has no control over storage handling use or application of this product, it must be disclaim responsibility for any unsatisfactory results obtained.

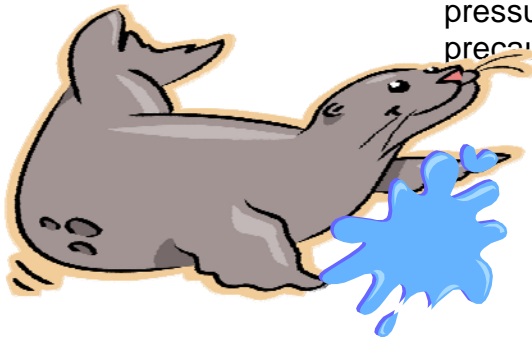

**SUMP DRI-SEAL IT**